Spam Classification

Get Messages | Write | Chat | Address Book | Tag | Quick Filter | Search... <⌘K>

From Google Corporation© <claudio.santoriello@finanzaefuturo.it>
Subject **Powered by Google**
Reply to Google Corporation© <mr.jonesbradley@foxmail.com>
To

Reply | Forward | Junk | Delete | More
08/10/15 15:39

Dear Google User,

You have been selected as a Google Ambassador for using Google services. Find attached letter for more details and Processing of your claims.

Best Regards,

Matt Brittin
Chairman of the Board and Managing Director,
Google United Kingdom

1 attachment: Google Notification Letter.pdf 367 KB

Save

?

Spam image by Qwertyxp2000 from https://commons.wikimedia.org/wiki/File:Spam_can.png

Spam Classification

Y_i: `spam' or `nospam'
X_i: e-mails (pre-processed)

Spam Classification

Y_i: `spam' or `nospam'
X_i: e-mails (pre-processed)

- Trivial $\mathcal{F} = \{\text{always say 'spam'}, \text{always say 'nospam'}\}$

Spam Classification

Y_i: `spam' or `nospam'
X_i: e-mails (pre-processed)

- Trivial $\mathcal{F} = \{\text{always say 'spam', always say 'nospam'}\}$
- $\mathcal{F} =$ all functions of the form

$$\text{IF } \%(\text{word}_1) > \theta_1 \text{ OR } \%(\text{word}_2) < \theta_2 \text{ THEN 'spam'; ELSE 'nospam'}$$

Spam Classification

Y_i: `spam' or `nospam'
X_i: e-mails (pre-processed)

- Trivial $\mathcal{F} = \{\text{always say 'spam', always say 'nospam'}\}$
- $\mathcal{F} =$ all functions of the form

$$\text{IF } \%(\text{word}_1) > \theta_1 \text{ OR } \%(\text{word}_2) < \theta_2 \text{ THEN 'spam'; ELSE 'nospam'}$$

- Empirical Risk Minimization:
  - Pick $\hat{f} \in \mathcal{F}$ with smallest nr. of mistakes on $\mathcal{T}$

Handwritten Digit Classification

Y_i: 0, 1, 2, ..., 9
X_i: picture of one digit =
$k \times k$ matrix of grey-values

- Nearest neighbour:
  - measure distance of new picture to all pictures in $\mathcal{T}$
  - choose same class as closest picture

General Image Classification

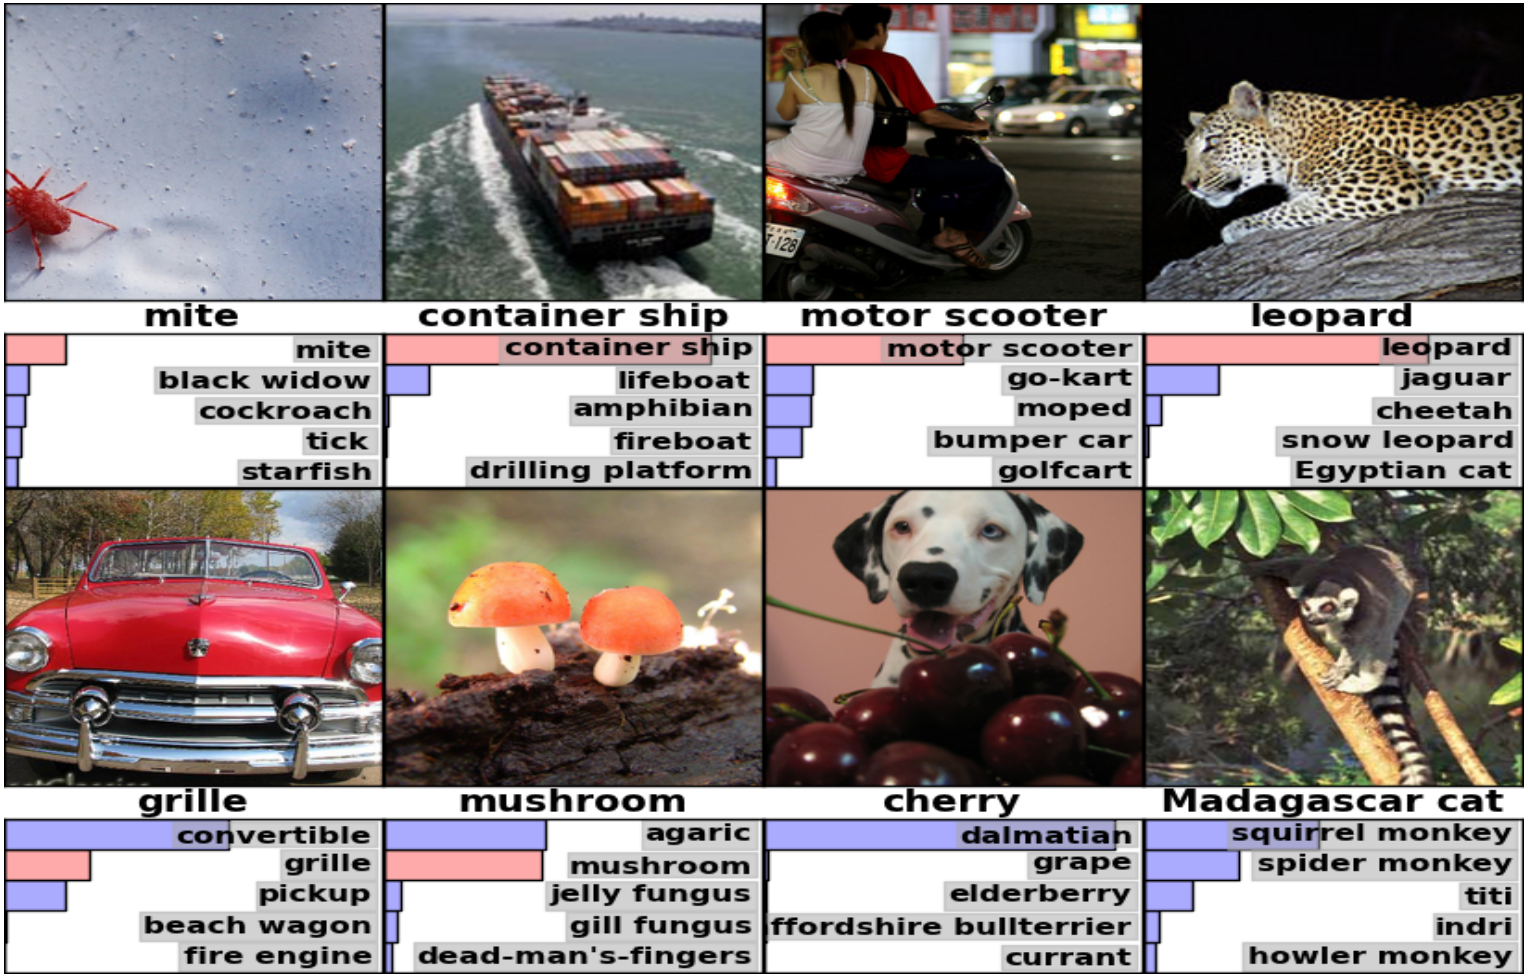

Krizhevsky, Sutskever, Hinton, ImageNet Classification with Deep Convolutional Neural Networks, NIPS 2012

Applications in Cancer Research

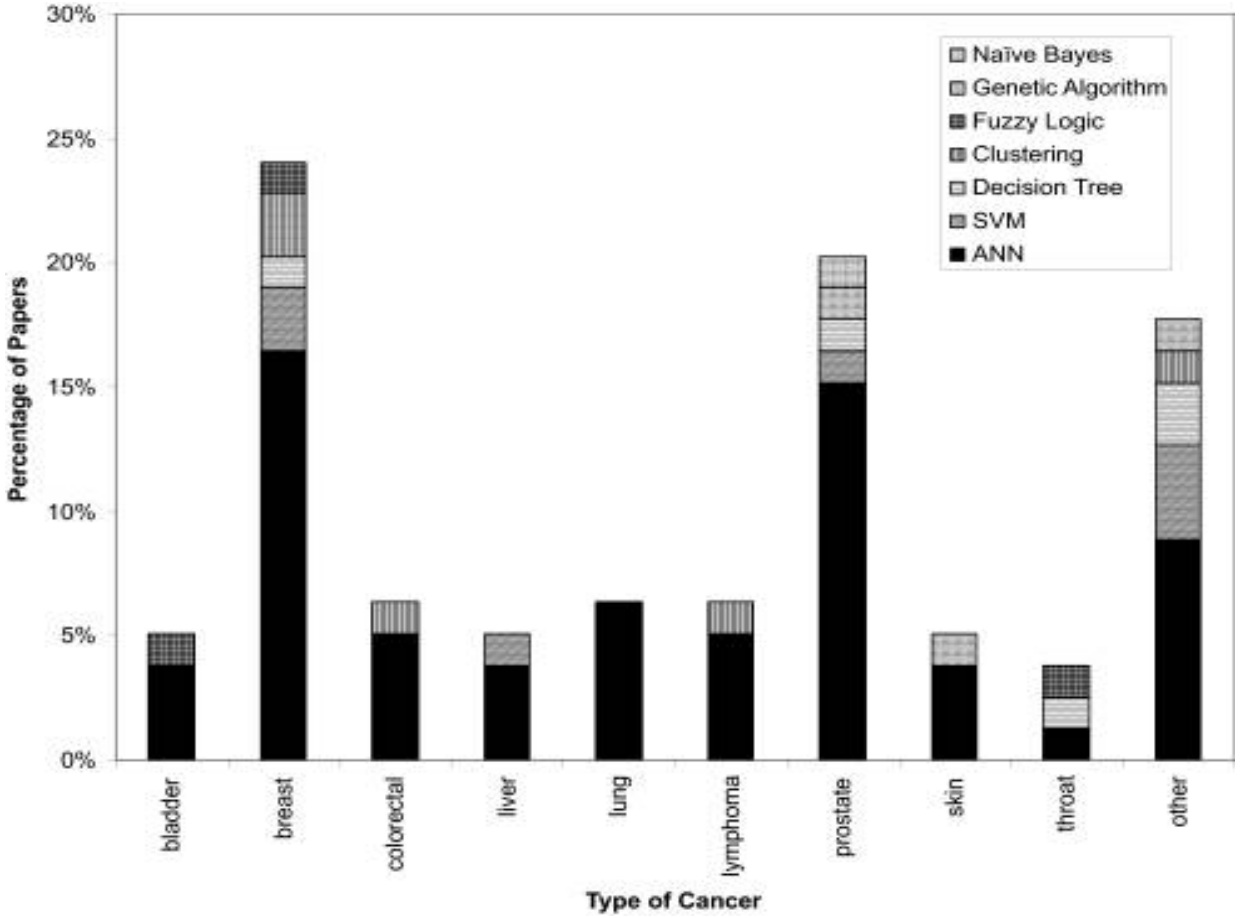

Cruz, Wishart, Applications of Machine Learning in Cancer Prediction and Prognosis, Cancer Informatics, 2:59-77, 2006.

Regression: Prostate Cancer

- Goal: predict level of PSA (prostate specific antigen) for men with prostate cancer

Y_i : **log psa**

X_i : **97 clinical measures**, including:

- log cancer volume
- log prostate weight
- Gleason score
- ...

See book for more details

Some Data

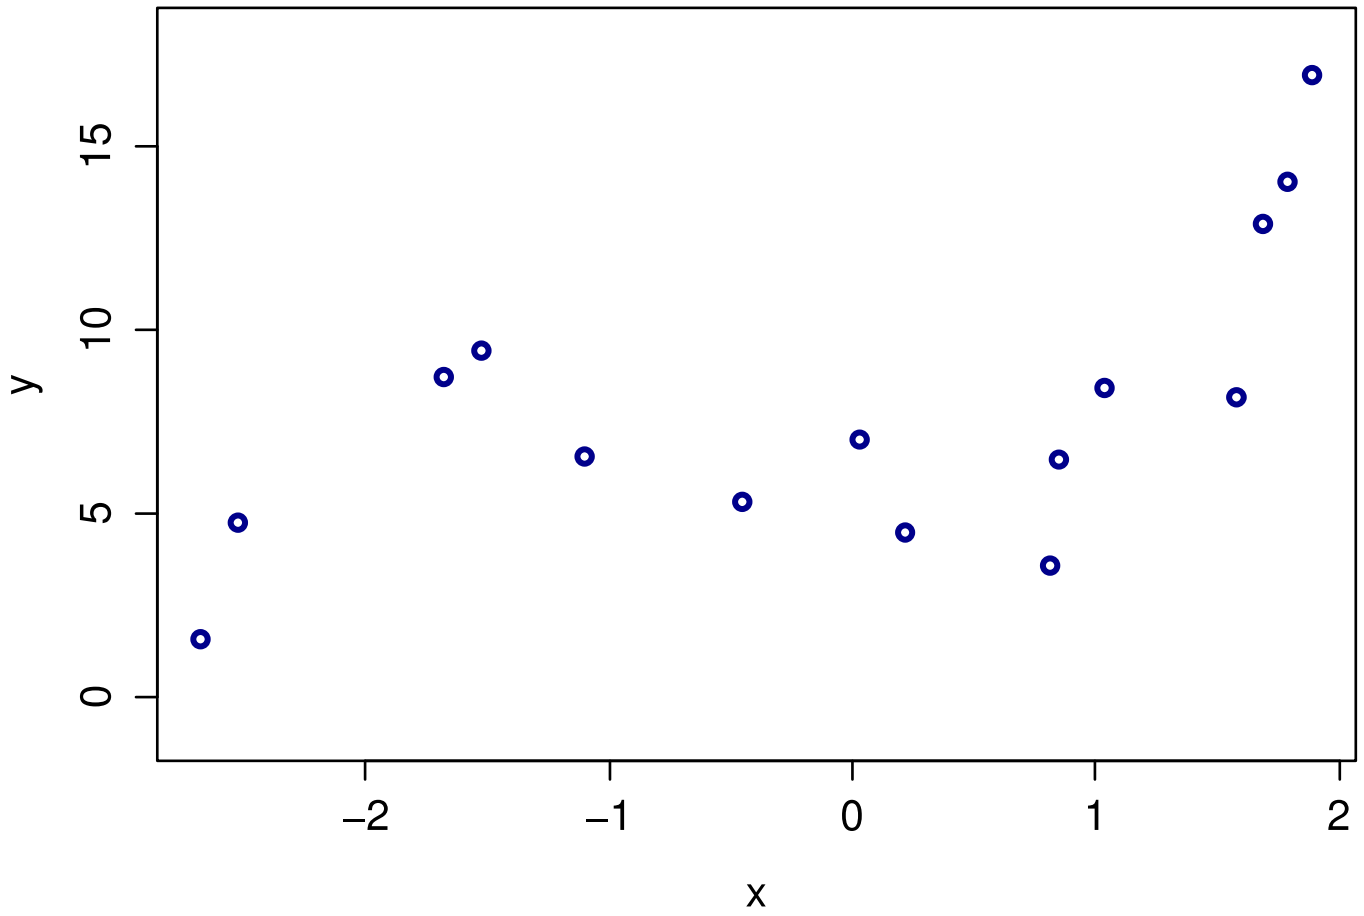

1-st Degree Polynomial

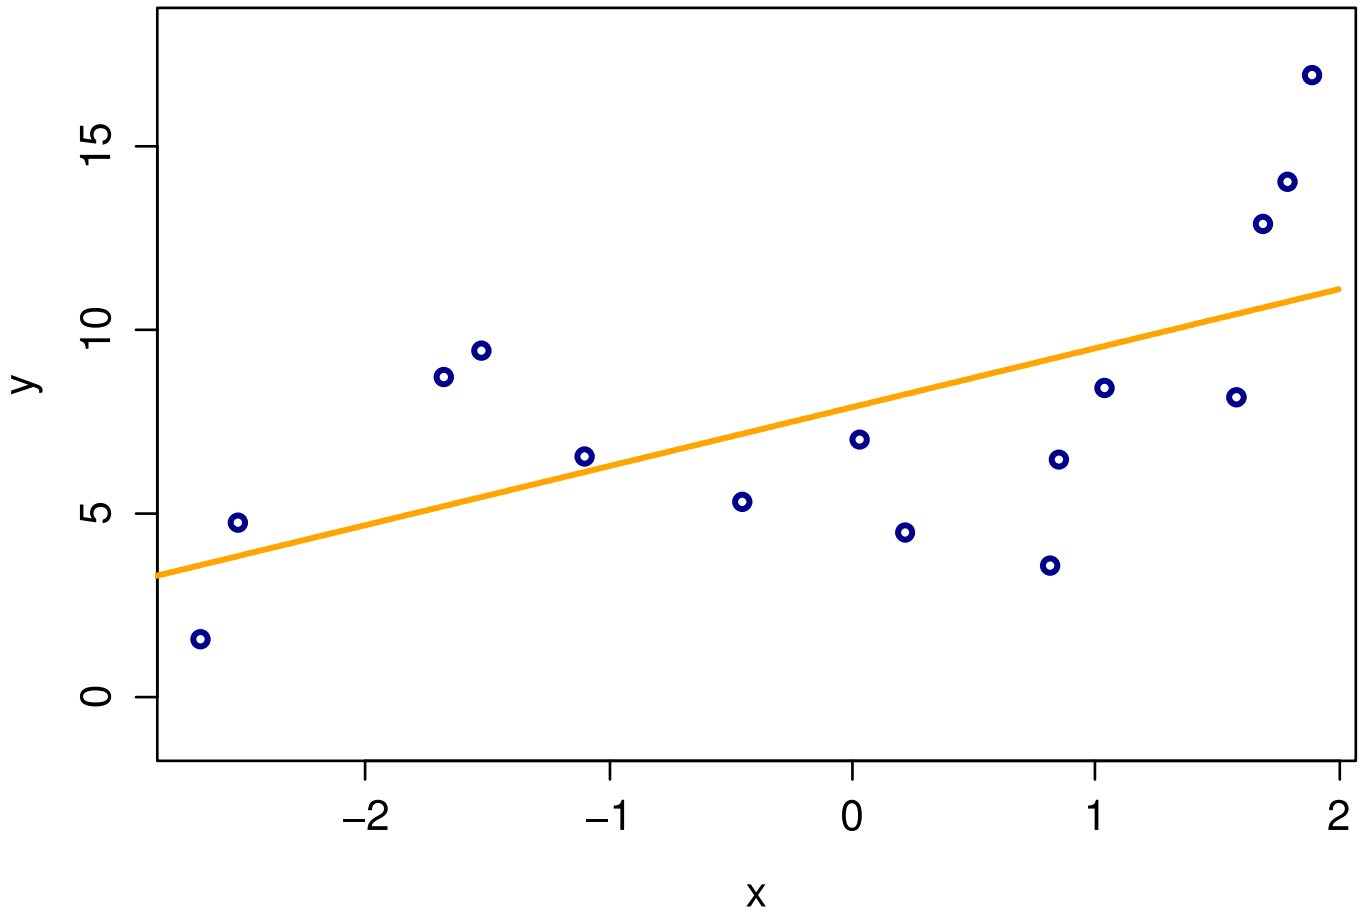

Underfitting: too few parameters

14-th Degree Polynomial: Perfect Fit on this Data

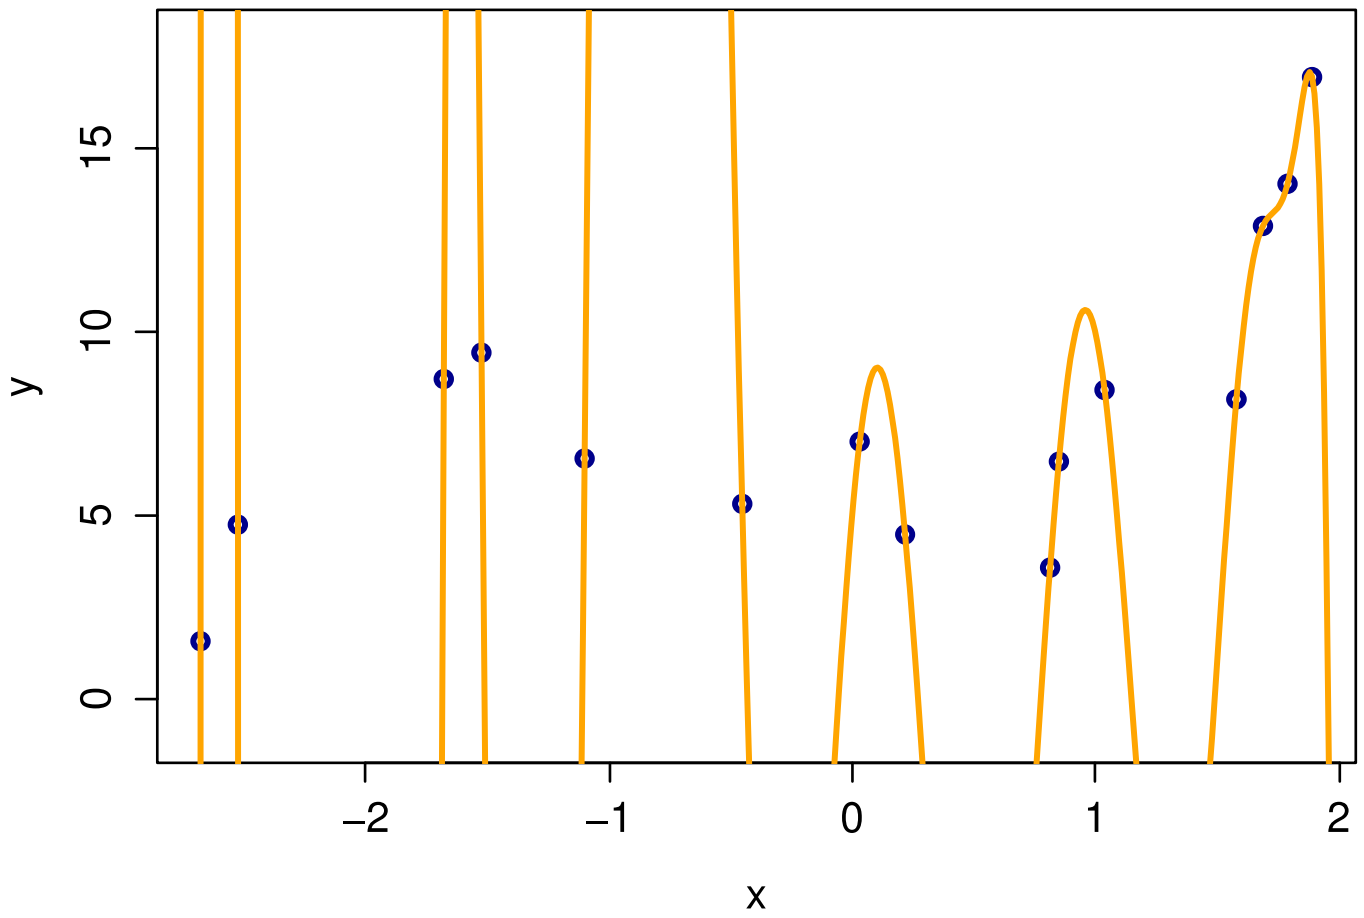

Overfitting: too many parameters!

3-rd Degree Polynomial

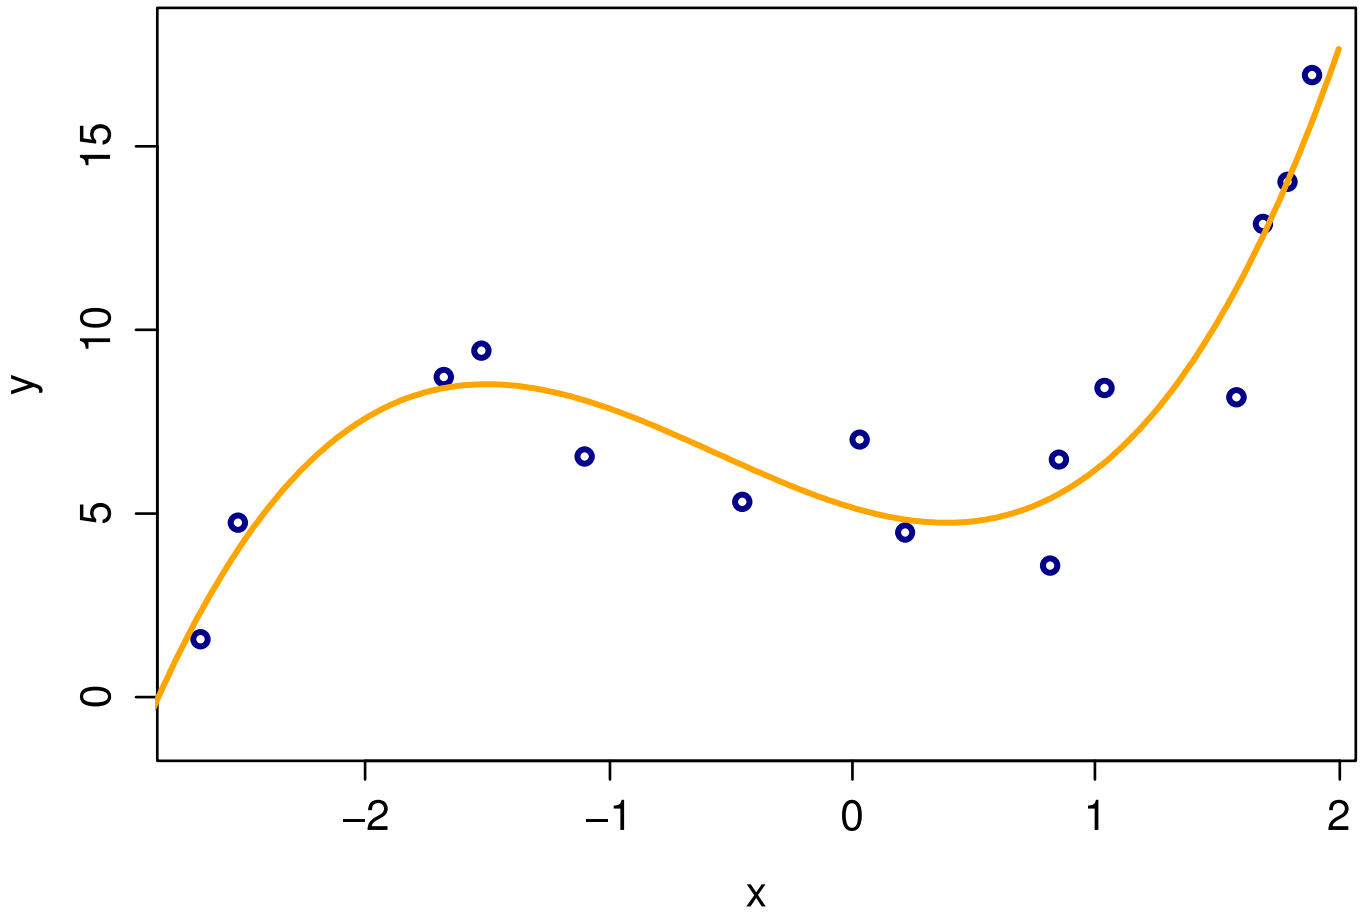

Intermediate nr. of parameters

3-rd Degree Polynomial

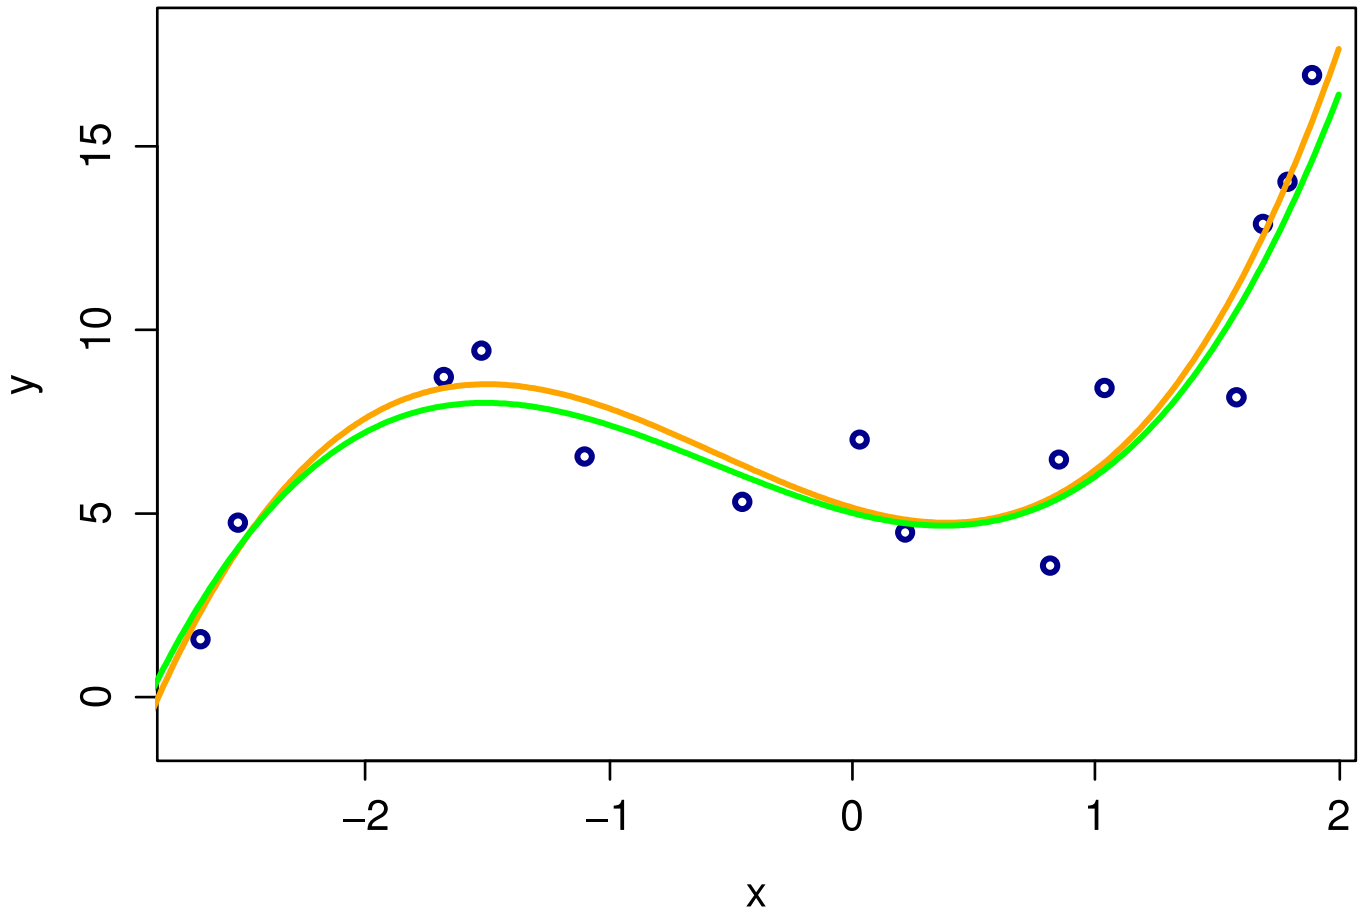

Intermediate nr. of parameters